


# Cord Seals

**Construction:** Precision machined brass with neoprene packing glands.



Model Number	Cord Size							
	NPT	Std.	Min. OD	Max. OD	A Inches	B Inches	A mm	B mm
J-22	1/2"	16-3	.39"	.43"	1	1 1/2	25	38
J-22-1	1/2"	18-3	.33"	.39"	1	1 1/2	25	38
J-29-2	3/4"	10-3	.63"	.69"	1 1/2	1 3/4	38	44
RCS-075F <sup>1</sup>	3/4" FPT	16-3	.39"	.43"	1 1/2	1 3/4	38	44

1. Grommet designed for one 16-3 Type STOW cord and one AWG No. 8 copper bonding wire.

# RLT Series


## Low Voltage Transformers

**Housing:** Class A, NEMA 3R for indoor or outdoor mounting.

**Primary Voltage:** 120VAC

**Secondary Voltage:** Isolated secondary output is 12VAC with 13 and 14VAC taps to compensate for voltage drop.

**Safety:** Underwriters Laboratories Listed for swimming pool application.

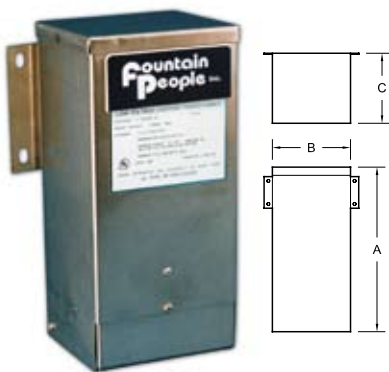

Model Number	Wattage	A Inches	B Inches	C Inches	A mm	B mm	C mm
RLT-100	100	8 1/2	4 1/2	3 7/8	216	114	98
RLT-300	300	8 1/2	4 5/8	4	216	117	102
RLT-500	500	10	4 3/4	4 1/4	254	121	108
RLT-1000	1000	13	5 7/8	5 3/4	330	149	146

# RPC-8882

## Junction Box Potting Compound

**Description:** Designed for use in underwater junction boxes to prevent entry of moisture. 12 oz. package of re-enterable encapsulant.

**RPC-8882** meets National Electrical Code, Article 680, requirements as an approved potting compound.

**NOTE:** Also recommended for junction boxes located outside of the pool that are below the pool water level.



Speaking the language of water.™

