


# Spray Ring

**Water Effect:** Creates a variety of patterns using adjustable nozzles.

**Performance Characteristics:** Since the Spray Ring utilizes adjustable .187" orifice precision jets to create effects, an in-line Y-strainer is recommended to reduce maintenance.

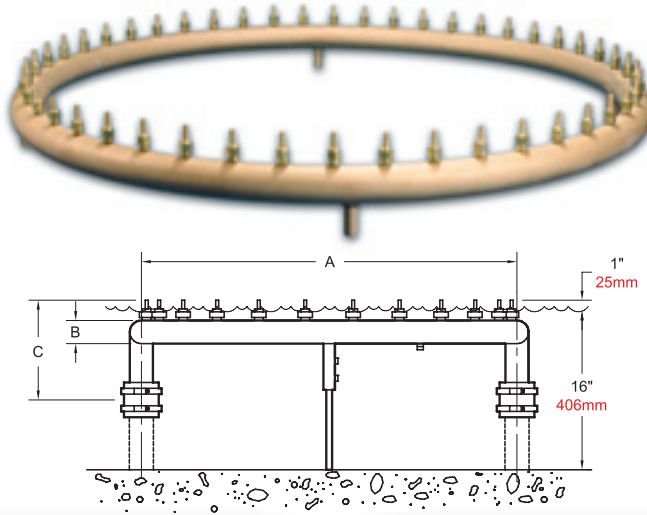

- **Water Level Dependent** - No
- **Wind Resistance** - Fair
- **Sound Level** - Moderate
- **Clogging Potential** - Moderate
- **Splash Radius** - 1.0 - 2.0

**Material:** Machined brass

**Finish:** Natural brass

**NOTE:** Spray Rings supplied with connecting hose and stainless steel hose clamps.



Inside Fall



Vertical



Basket Weave



Outside Fall

Speaking the language of water.™



# Spray Ring

Model Number	Feet Meters	Spray Height									
		2	3	4	5	6	8	10	12	14	16
EPR-18	GPM	18	25	32	34	35					
	Head Ft.	3	4.5	6	7.5	9					
	LPM	69	95	122	129	133					
	Bar	.090	.135	.179	.224	.269					
EPR-24	GPM	24	34	43	45	47	55				
	Head Ft.	3	4.5	6	7.5	9	12				
	LPM	91	129	163	171	178	209				
	Bar	.090	.135	.179	.224	.269	.359				
EPR-30	GPM	30	42	53	56	59	69				
	Head Ft.	3	4.5	6	7.5	9	12				
	LPM	114	159	201	212	224	262				
	Bar	.090	.135	.179	.224	.269	.359				
EPR-36	GPM	36	50	64	68	71	83	95			
	Head Ft.	3	4.5	6	7.5	9	12	15			
	LPM	137	190	243	258	269	315	360			
	Bar	.090	.135	.179	.224	.269	.359	.448			
EPR-48	GPM	48	67	85	90	94	110	127	148		
	Head Ft.	3	4.5	6	7.5	9	12	15	18		
	LPM	182	254	322	341	356	417	481	561		
	Bar	.090	.135	.179	.224	.269	.359	.448	.538		
EPR-60	GPM	60	83	106	112	118	139	159	185		
	Head Ft.	3	4.5	6	7.5	9	12	15	18		
	LPM	228	315	402	424	447	527	602	701		
	Bar	.090	.135	.179	.224	.269	.359	.448	.538		
EPR-72	GPM	72	100	127	134	141	166	191	222	246	
	Head Ft.	3	4.5	6	7.5	9	12	15	18	21	
	LPM	273	379	481	508	534	629	724	841	932	
	Bar	.090	.135	.179	.224	.269	.359	.448	.538	.628	
EPR-96	GPM	96	133	170	179	188	222	254	295	327	
	Head Ft.	3	4.5	6	7.5	9	12	15	18	21	
	LPM	364	504	644	678	712	841	962	1,117	1,238	
	Bar	.090	.135	.179	.224	.269	.359	.448	.538	.628	
EPR-120	GPM	120	166	212	224	235	277	318	369	409	435
	Head Ft.	3	4.5	6	7.5	9	12	15	18	21	25
	LPM	455	629	803	848	890	1,049	1,204	1,397	1,549	1,647
	Bar	.090	.135	.179	.224	.269	.359	.448	.538	.628	.747
EPR-180	GPM	180	249	318	336	353	415	477	554	614	652
	Head Ft.	3	4.5	6	7.5	9	12	15	18	21	25
	LPM	682	943	1,204	1,272	1,337	1,571	1,806	2,098	2,325	2,469
	Bar	.090	.135	.179	.224	.269	.359	.448	.538	.628	.747
EPR-240	GPM	240	333	425	448	471	554	636	738	818	869
	Head Ft.	3	4.5	6	7.5	9	12	15	18	21	25
	LPM	909	1,261	1,609	1,696	1,783	2,098	2,408	2,794	3,097	3,290
	Bar	.090	.135	.179	.224	.269	.359	.448	.538	.628	.747

Highlighted values denote optimum performance.

Model Number	Inlet		A Feet	B Inches	C Inches	A m	B mm	C mm	Number of Jets	Flush Plugs		Number of Legs
	Qty	Size								Qty	Size	
EPR-18	1	1 1/2"	1.5	1 1/2	6 1/2	.46	38	165	18	1	1/2"	2
EPR-24	2	1 1/2"	2	1 1/2	6 1/2	.61	38	165	24	1	1/2"	2
EPR-30	2	1 1/2"	2.5	1 1/2	6 1/2	.76	38	165	30	1	1/2"	2
EPR-36	2	1 1/2"	3	1 1/2	6 1/2	.91	38	165	36	1	1/2"	2
EPR-48	2	2"	4	2	6 1/2	1.22	51	165	48	1	1/2"	2
EPR-60	2	2"	5	2	7	1.52	51	178	60	1	1/2"	2
EPR-72	4	2"	6	2	7	1.83	51	178	72	2	1/2"	4
EPR-96	4	2"	8	2	7	2.44	51	178	96	2	1/2"	4
EPR-120	4	2"	10	2	7	3.05	51	178	120	2	1/2"	4
EPR-180	6	2"	15	2	7	4.57	51	178	180	3	1/2"	6
EPR-240	8	2"	20	2	7	6.10	51	178	240	4	1/2"	8

Speaking the language of water.

