

FMN Series

Flush Mount Zero Entry Nozzle:

FMN-ZEN Series (Zero Entry) Flush Mount Nozzle produces an aerated bubbler effect that is flush with the concrete surface in the zero-entry area of a pool for operation in 3"-6" of water.

Specification:

FMN-ZEN Series Flush Mount Nozzle, machined 304 stainless steel, 1" FNPT connection, and a stainless steel insert with machined orifice. Available in brass.

Material: Machined stainless steel or brass
 Finish: Stainless steel or natural brass






Details

| Model Number | Dimension | | Inlet FPT | Orifice Diameter | Submersion Depth | Feet | Spray Height | | | |
|--------------|-----------|----|-----------|------------------|------------------|----------|--------------|----|-----|----|
| | A | B | | | | | .5 | 1 | 1.5 | 2 |
| FMN-100-ZEN | 2 5/8" | 2" | 1" | .109" | 3" | GPM | 16 | 19 | 23 | 29 |
| | | | | | | Head Ft. | 7 | 11 | 16 | 23 |
| | | | | | 6" | GPM | 22 | 25 | 34 | 44 |
| | | | | | | Head Ft. | 14 | 20 | 30 | 38 |

TECHNICAL NOTES

1. WATERSTOP FITTING REQUIRED FOR CONCRETE POUR. SIZE BASED ON PIPING AND NOZZLE SIZE. (SEE CATALOG ITEM: FWS-SERIES)
2. NOZZLE REQUIRES FINE SCREENING FOR DEBRIS REMOVAL. #40 MINIMUM MESH OR SMALLER.

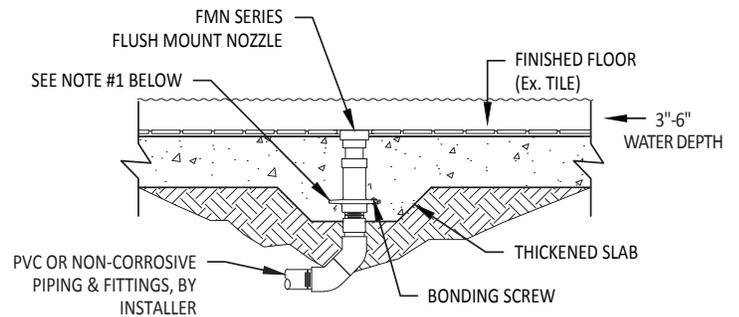

ELEVATION VIEW

2021-01