

DOM Series

Dominator™ Nozzle:



DOM Series Dominator™ Nozzle provides an aerated stream of water with low clog potential.

Specification:

DOM Series Dominator™ Nozzle, machined brass and cast bronze construction, angle adjustable swivel up to 15° off vertical. FNPT connection.

- Water Level Dependent - No
- Wind Resistance - Good
- Sound Level - Moderate
- Clogging Potential - Low
- Splash Radius - 1.0

Material: Machined brass and cast bronze
Finish: Natural brass and bronze

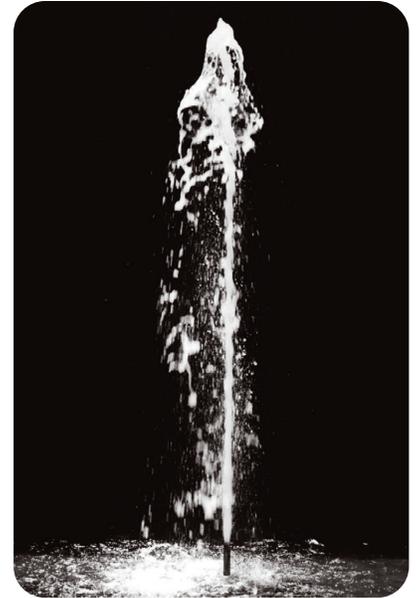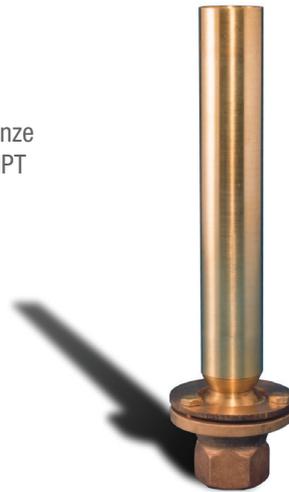


Details

Model Number	NPT	Dimensions			Feet	Spray Height								
		A	B	C		3	4	5	6	8	10	15	20	25
DOM-075	¾"	9"	⅞"	2¾"	GPM	7	8	9	10	12	15			
					Head Ft.	4.5	7	8	10.5	14	17.5			
DOM-100	1"	10½"	1¼"	2¾"	GPM	11	14	17	20	25	30	38	46	
					Head Ft.	4.5	6	8	10.5	14	18.5	30	41.5	
DOM-150	1½"	14¾"	1⅝"	3⅝"	GPM		40	45	50	58	67	80	95	106
					Head Ft.		6	8	9	11.5	16	24.5	32	44

Highlighted sections indicate optimum performance

TECHNICAL NOTES:

1. BALL VALVE AS REQUIRED PER DESIGN FOR DISCHARGE FLOW CONTROL.
2. WATERSTOP FITTING REQUIRED FOR CONCRETE POUR. SIZE BASED ON PIPING AND NOZZLE SIZE. (SEE CATALOG ITEM: FWS-SERIES)
3. TYPICAL WATER DEPTH SHOWN MAY VARY. CONTACT FOUNTAIN PEOPLE FOR SHALLOWER APPLICATIONS.
4. THIS NOZZLE IS WATER LEVEL INDEPENDENT.

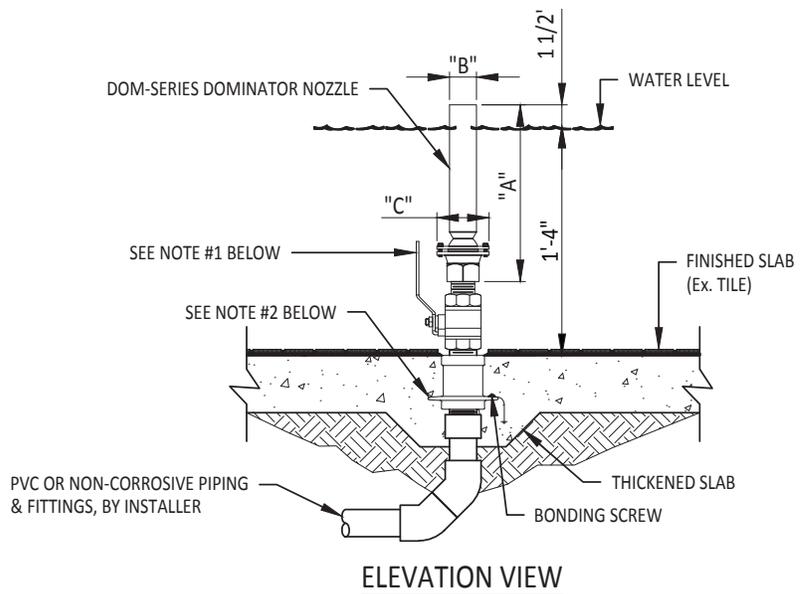

2021-01