

# FRO Series

## Frothy Nozzle:


FRO Series Frothy Nozzle provides a frothy mix of air and water, giving the illusion of a high column of water.

## Specification:

FRO Series Frothy Nozzle, stainless steel construction, works independently of the water level so that fluctuations in the water level do not affect the water pattern.

- Water Level Dependent - No
- Wind Resistance - Good
- Sound Level - Moderate
- Clogging Potential - Low
- Splash Radius - 1.5

Material: FRO-100 (stainless steel and ABS plastic),  
 FRO-150 (stainless steel), FRO-200 (Brass)  
 Finish: Polished Stainless steel, or Brass

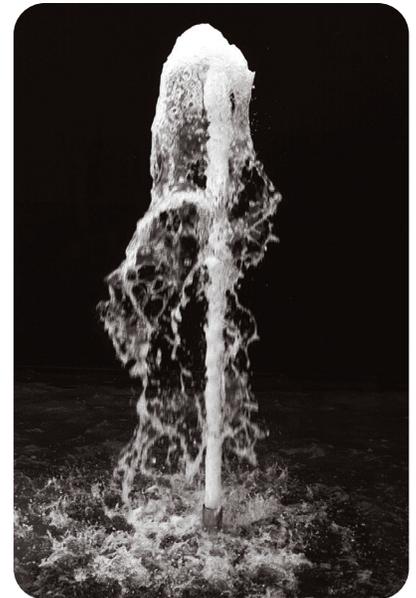



## Details

Model Number	NPT	Dimensions		Feet	Spray Height											
		A	B		3	4	5	6	7	8	10	11	13	15	16	20
FRO-100	1"	5¼"	2¾"	GPM	21	23	26	28	30	32						
				Head Ft.	9	11	13	15	18	22						
FRO-150	1½"	7"	3⅜"	GPM	46	52	58	63	68	74	83	85	94	101	108	118
				Head Ft.	6	8	9	11	13	16	19	22	26	29	32	39
FRO-200	2"	9½"	4"	GPM	86	96	107	119	130	134	152	164	173	185	187	214
				Head Ft.	6.5	8	10	11.5	13.5	16	19.5	23	26	29	32	39

Highlighted sections indicate optimum performance

### TECHNICAL NOTES:

1. BALL VALVE AS REQUIRED PER DESIGN FOR DISCHARGE FLOW CONTROL.
2. WATERSTOP FITTING REQUIRED FOR CONCRETE POUR. SIZE BASED ON PIPING AND NOZZLE SIZE. (SEE CATALOG ITEM: FWS-SERIES)
3. TYPICAL WATER DEPTH SHOWN MAY VARY. CONTACT FOUNTAIN PEOPLE FOR SHALLOWER APPLICATIONS.
4. THIS NOZZLE IS WATER LEVEL INDEPENDENT.

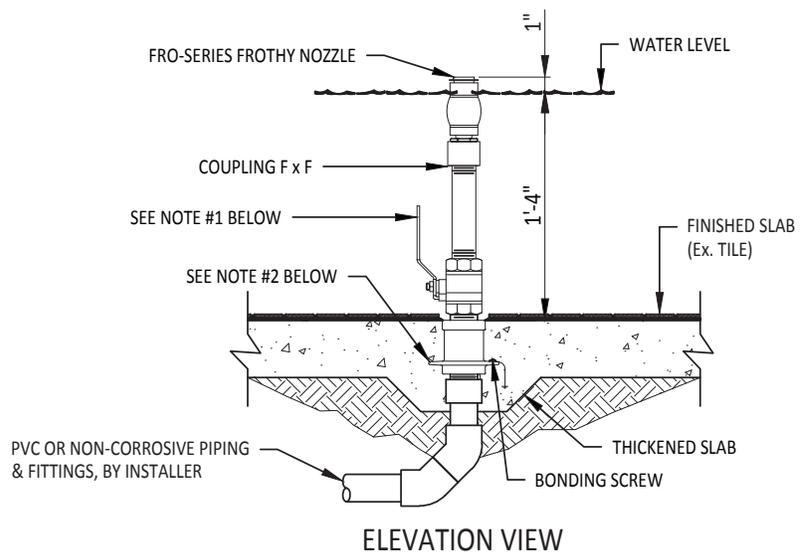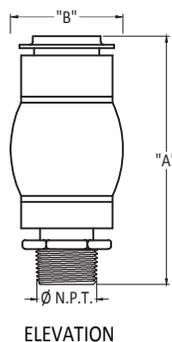

2021-01