

SPR Series

Spray Ring:


SPR Series Spray Ring Nozzle provides a variety of patterns using a prefabricated ring of adjustable nozzles.

Specification:

SPR Series Spray Ring Nozzle, brass construction, utilizes adjustable .187" orifice precision jets (quantity of nozzles based on ring diameter), an in-line Y-stainer is recommended to reduce maintenance.

- Water Level Dependent - No
- Wind Resistance - Fair
- Sound Level - Moderate
- Clogging Potential - Moderate
- Splash Radius - 1.0 to 2.0

Material: Machined brass
Finish: Natural brass

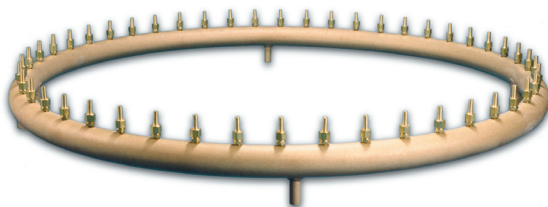

Dome



Inside Fall



Vertical



Basket Weave



Outside Fall

2021-01



fountain people™
A PLAYCORE Company

Creating compelling guest experiences with water.

Fountain People, Inc.
4600 HWY 123, San Marcos, TX 78666 | (512) 392-1155
info@fountainpeople.com | www.fountainpeople.com

SPR Series - Spray Ring Data


Spray Ring: Details

Model Number	Inlet		A	B	C	Number of Jets	Flush Plugs		Number of Legs	Feet	Spray Height									
	Qty	Size	Ft.	In.	In.		Qty	Size			2	3	4	5	6	8	10	12	14	16
SPR-18	1	1½"	1.5	1½	6½	18	1	½"	2	GPM	18	25	32	34	35					
											Head Ft.	3	4.5	6	7.5	9				
SPR-24	2	1½"	2	1½	6½	24	1	½"	2	GPM	24	34	43	45	47	55				
											Head Ft.	3	4.5	6	7.5	9	12			
SPR-30	2	1½"	2.5	1½	6½	30	1	½"	2	GPM	30	42	53	56	59	69				
											Head Ft.	3	4.5	6	7.5	9	12			
SPR-36	2	1½"	3	1½	6½	36	1	½"	2	GPM	36	50	64	68	71	83	95			
											Head Ft.	3	4.5	6	7.5	9	12	15		
SPR-48	2	2"	4	2	6½	48	1	½"	2	GPM	48	67	85	90	94	110	127	148		
											Head Ft.	3	4.5	6	7.5	9	12	15	18	
SPR-60	2	2"	5	2	7	60	1	½"	2	GPM	60	83	106	112	118	139	159	185		
											Head Ft.	3	4.5	6	7.5	9	12	15	18	
SPR-72	4	2"	6	2	7	72	2	½"	4	GPM	72	100	127	134	141	166	191	222	246	
											Head Ft.	3	4.5	6	7.5	9	12	15	18	21
SPR-96	4	2"	8	2	7	96	2	½"	4	GPM	96	133	170	179	188	222	254	295	327	
											Head Ft.	3	4.5	6	7.5	9	12	15	18	21
SPR-120	4	2"	10	2	7	120	2	½"	4	GPM	120	166	212	224	235	277	318	369	409	435
											Head Ft.	3	4.5	6	7.5	9	12	15	18	21
SPR-180	6	2"	15	2	7	180	3	½"	6	GPM	180	249	318	336	353	415	477	554	614	652
											Head Ft.	3	4.5	6	7.5	9	12	15	18	21
SPR-240	8	2"	20	2	7	240	4	½"	8	GPM	240	333	425	448	471	554	636	738	818	869
											Head Ft.	3	4.5	6	7.5	9	12	15	18	21

Highlighted sections indicate optimum performance

TECHNICAL NOTES:

1. TYPICAL WATER DEPTH MAY VARY. CONTACT FOUNTAIN PEOPLE FOR SHALLOWER APPLICATIONS.
2. WATERSTOP FITTING REQUIRED FOR CONCRETE POUR. SIZE BASED ON PIPING AND NOZZLE SIZE (SEE CATALOG ITEM: FWS-SERIES)
3. THIS NOZZLES IS WATER LEVEL INDEPENDENT.
4. NOZZLE REQUIRES FINE SCREENING FOR DEBRIS REMOVAL. #40 MESH OR SMALLER.

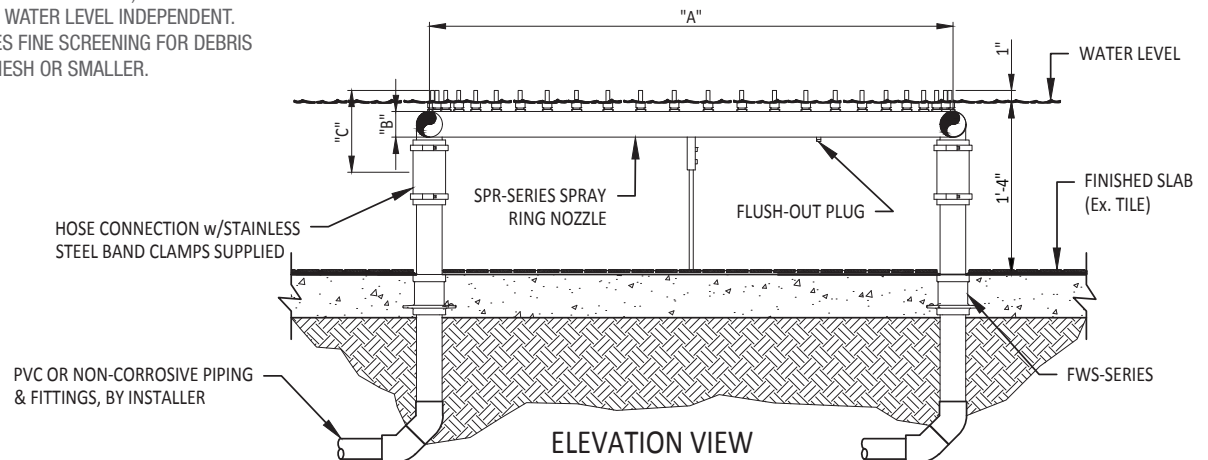

2021-01



fountain people[™]
A PLAYCORE Company

Creating compelling guest experiences with water.

Fountain People, Inc.

4600 HWY 123, San Marcos, TX 78666 | (512) 392-1155
info@fountainpeople.com | www.fountainpeople.com