
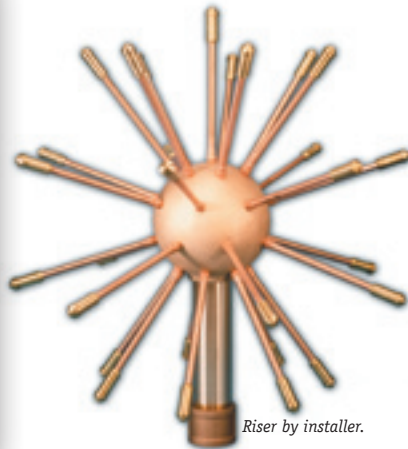



# Dandelion

**Water Effect:** Creates a sphere of flat circles of water.

**Performance Characteristics:** The Dandelion has very small orifices and is subject to wind. 100% filtration is recommended to minimize maintenance.

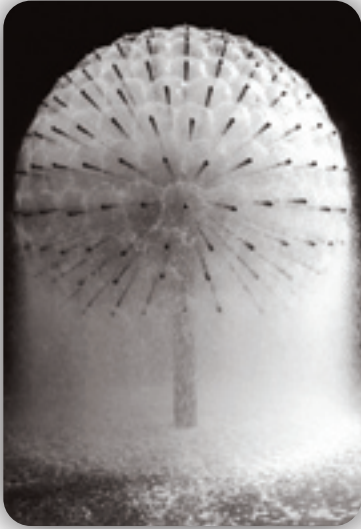

Riser by installer.



- **Water Level Dependent** - No
- **Wind Resistance** - Poor
- **Sound Level** - Moderate
- **Clogging Potential** - High
- **Splash Radius** - 2.0

**Material:** Machined brass, cast bronze, and copper

**Finish:** Natural brass, bronze, and copper

Model Number	Number of Arms	Ball Dia. Inches	Pool Dia. Feet	GPM	Head Feet	Ball Dia. mm	Pool Dia. m	LPM	Bar
N-300	29	10	15	75	15	254	4.6	284	.448
N-301	29	10	18	75	16	254	5.5	284	.478
N-305	61	10	18	155	16	254	5.5	587	.478
N-306	61	10	20	155	17	254	6.1	587	.508
N-307	61	10	24	155	17	254	7.3	587	.508
N-320	253	20	30	630	19	508	9.1	2,385	.568
N-325	385	20	35	960	20	508	10.7	3,634	.598

Model Number	NPT <sup>1</sup>	Dimensions					
		A Feet	B Inches	C Feet	A m	B mm	C m
N-300	2 <sup>1</sup> / <sub>2</sub> "	3	5	3.5	.91	127	1.07
N-301	2 <sup>1</sup> / <sub>2</sub> "	4	5	4	1.22	127	1.22
N-305	2 <sup>1</sup> / <sub>2</sub> "	4	5	4	1.22	127	1.22
N-306	2 <sup>1</sup> / <sub>2</sub> "	5	5	4.5	1.52	127	1.37
N-307	2 <sup>1</sup> / <sub>2</sub> "	6	5	5	1.83	127	1.52
N-320†	6"	8	8 <sup>3</sup> / <sub>4</sub>	6	2.44	222	1.83
N-325†	6"	10	8 <sup>3</sup> / <sub>4</sub>	7	3.05	222	2.13

1. To specify British Standard Pipe Threads, add suffix **-BSP** to Catalog Number

† Flanged inlet connection

Speaking the language of water.™

